




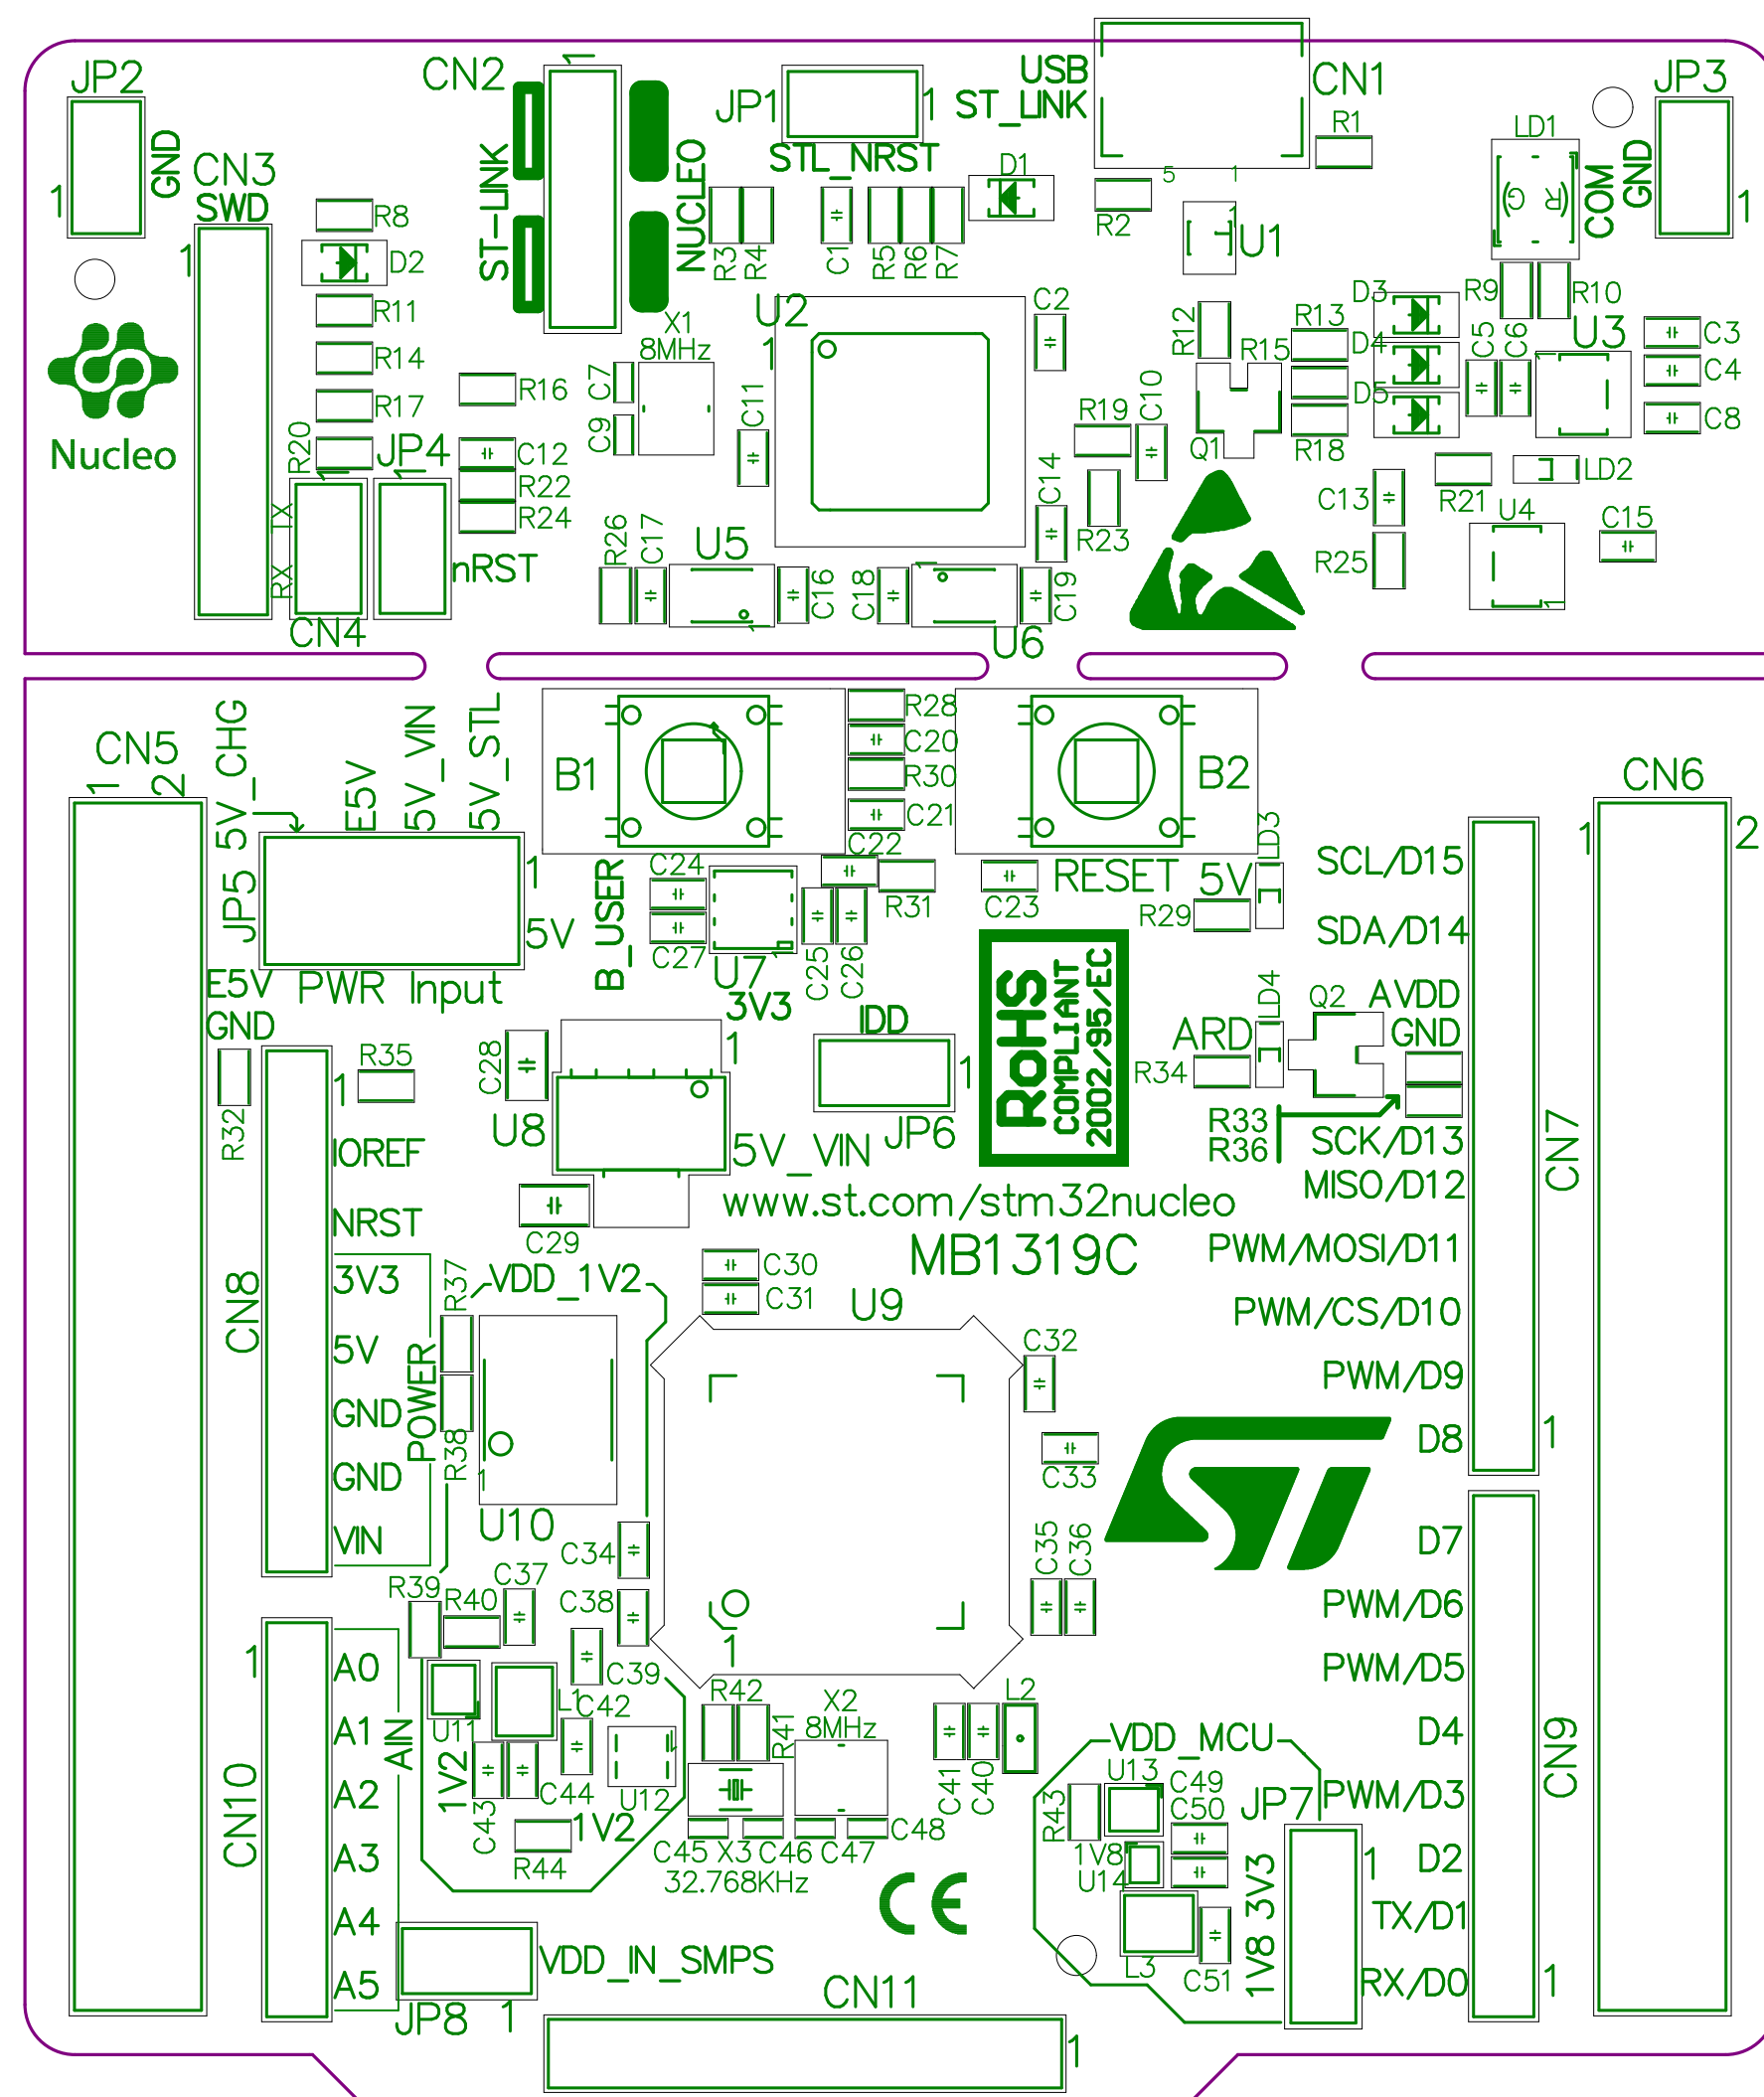

SILKSCREEN, (PRIMARY)

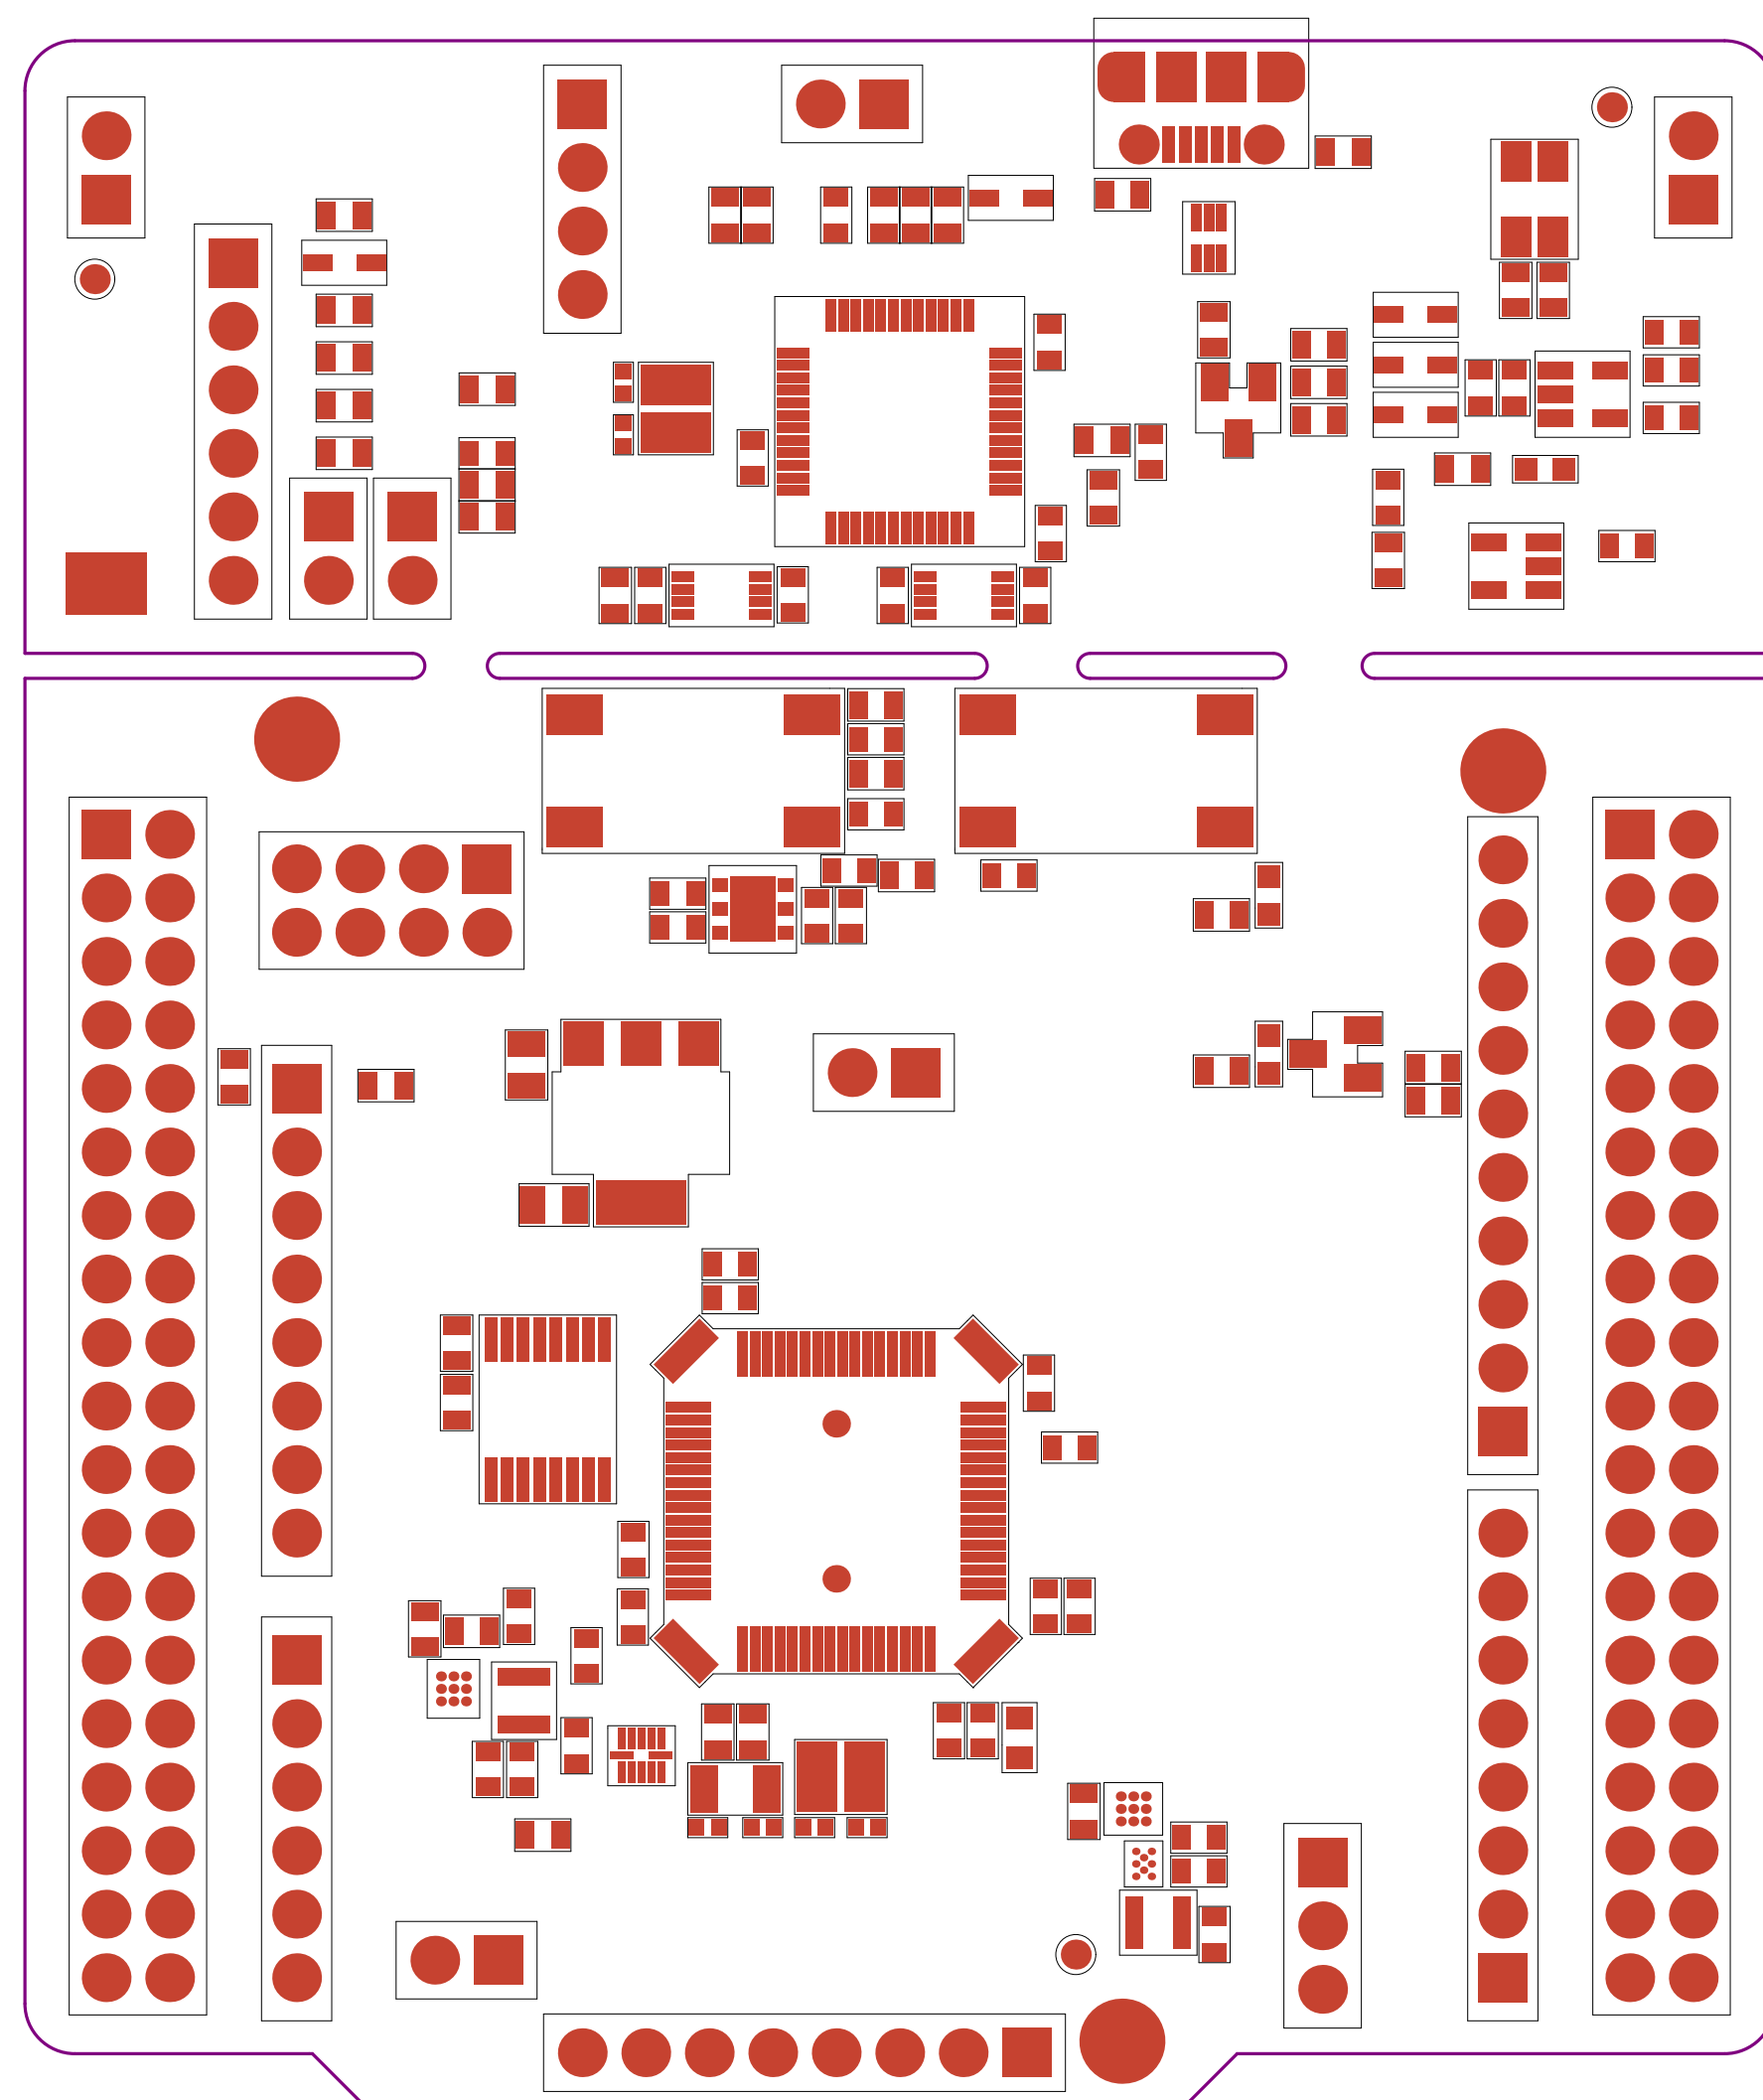


SOLDER MASK, (PRIMARY)

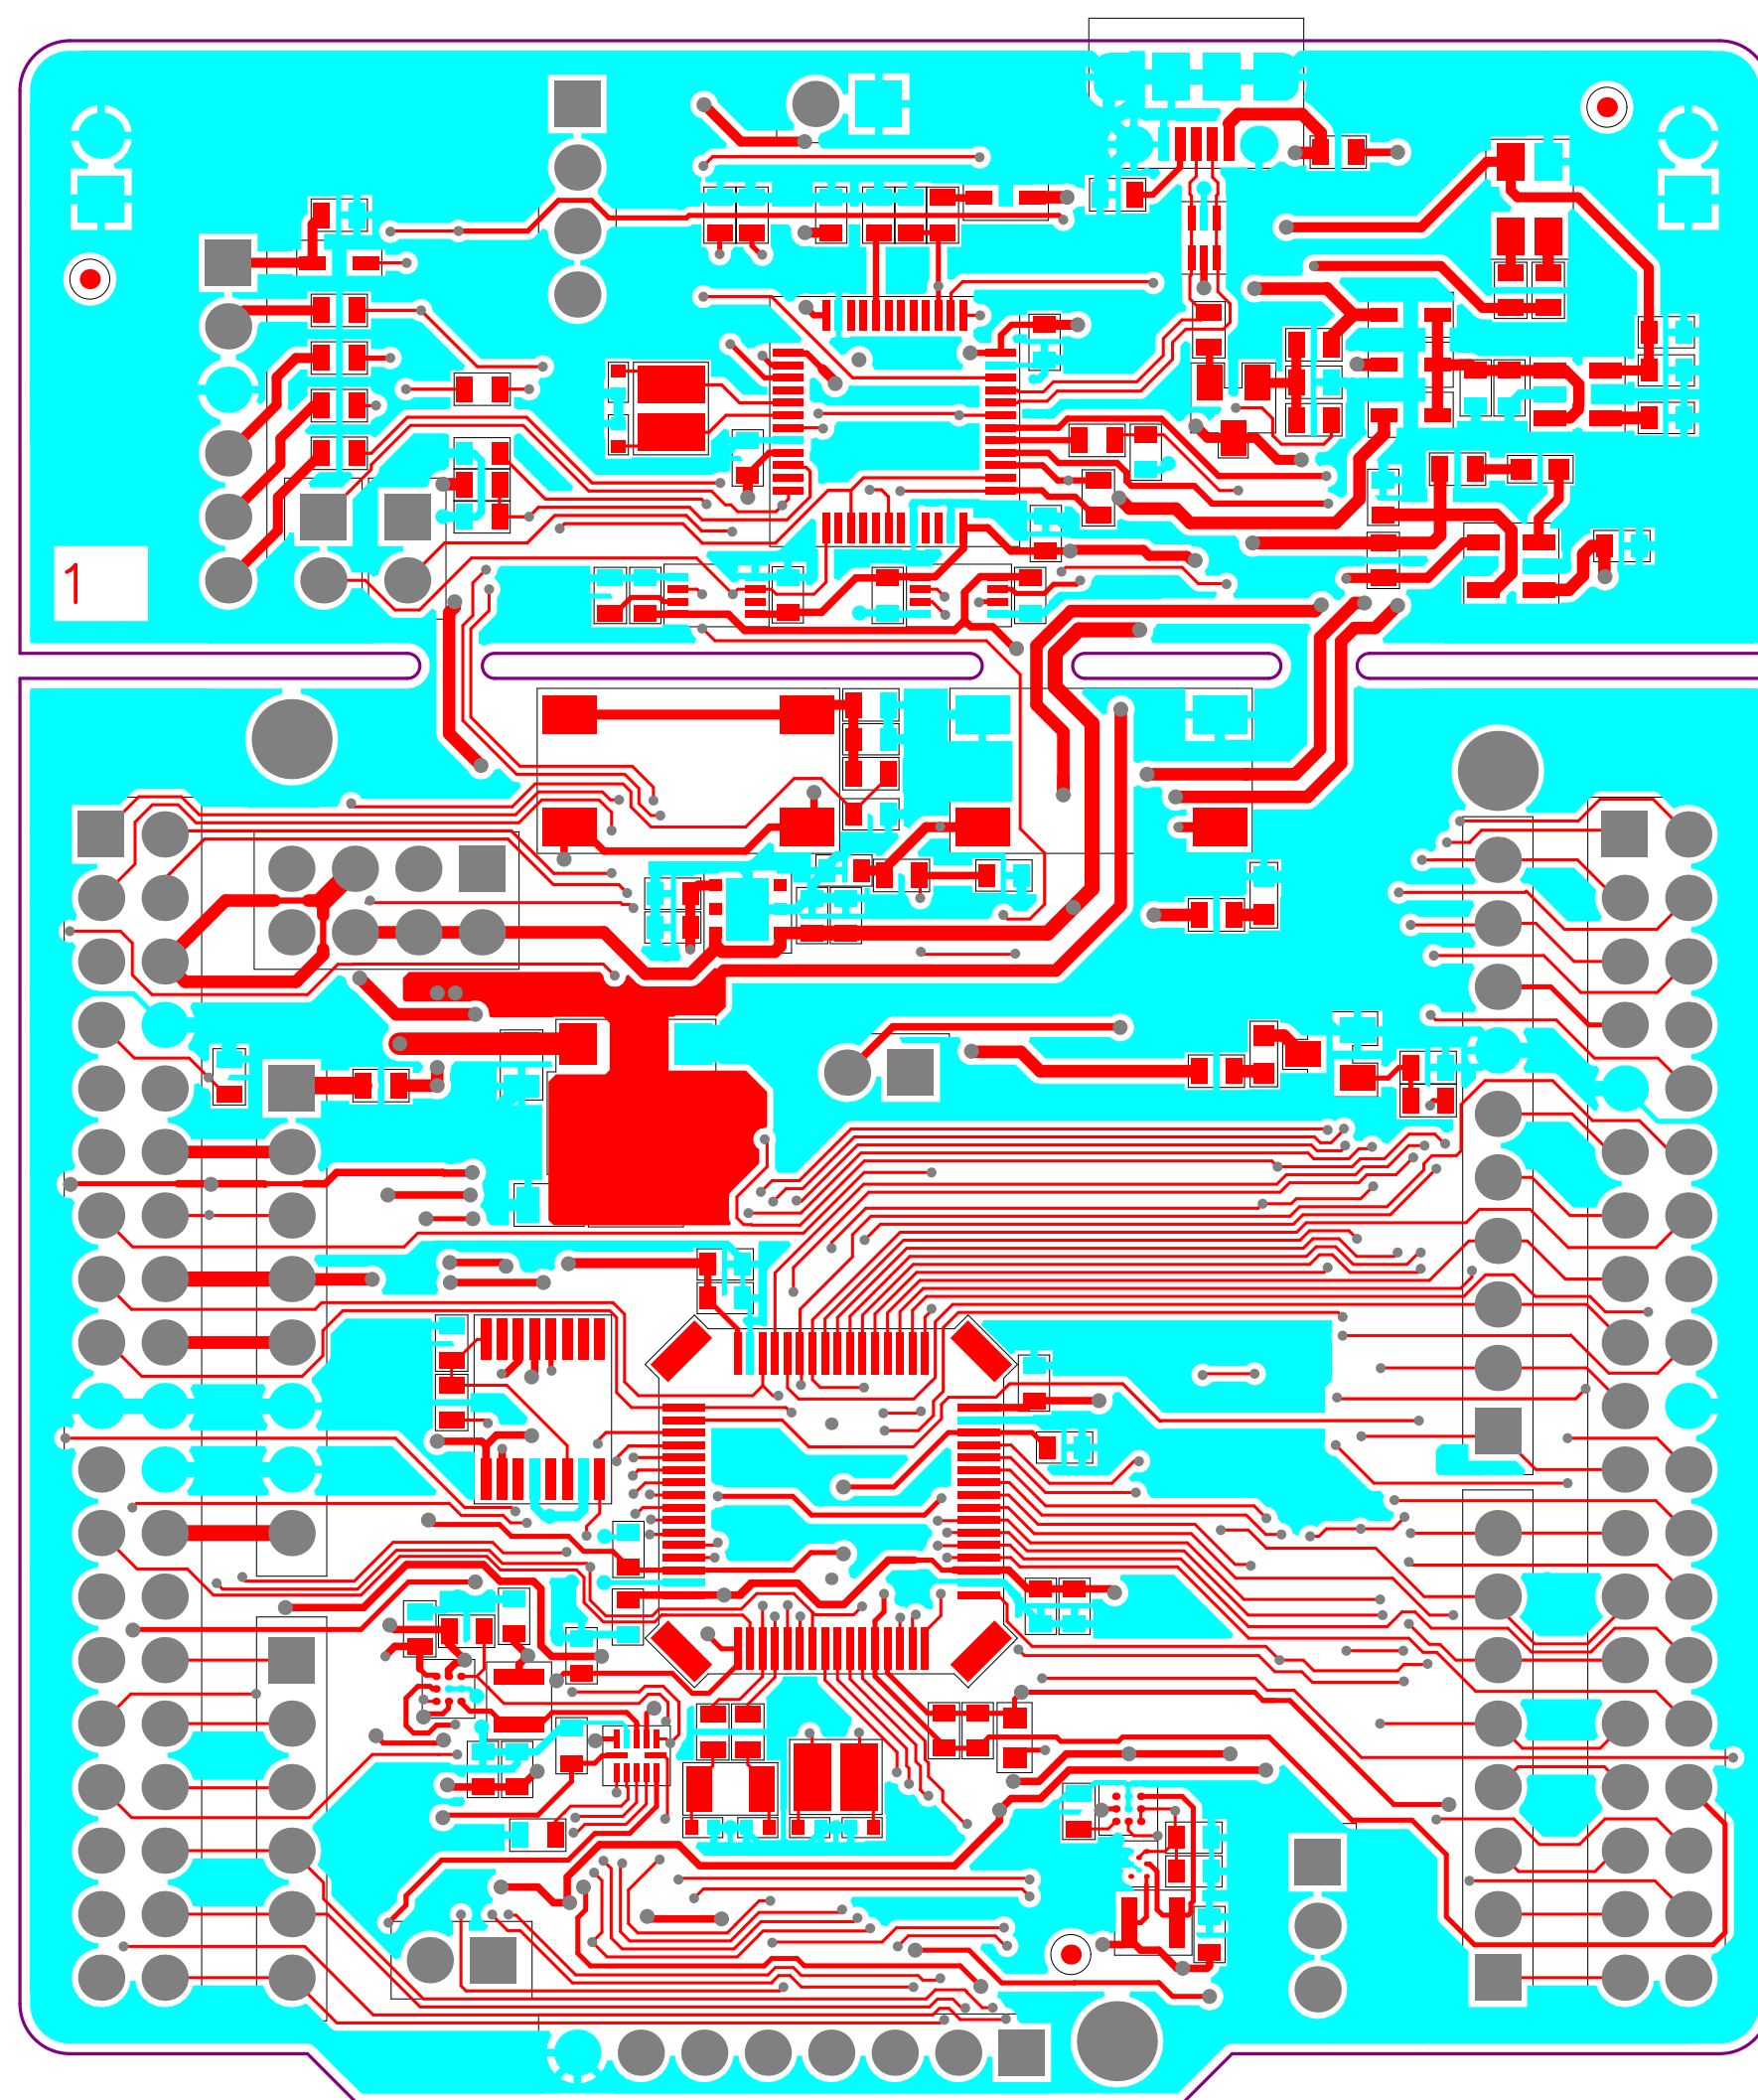


1


PRIMARY SIDE

SECONDARY SIDE
2

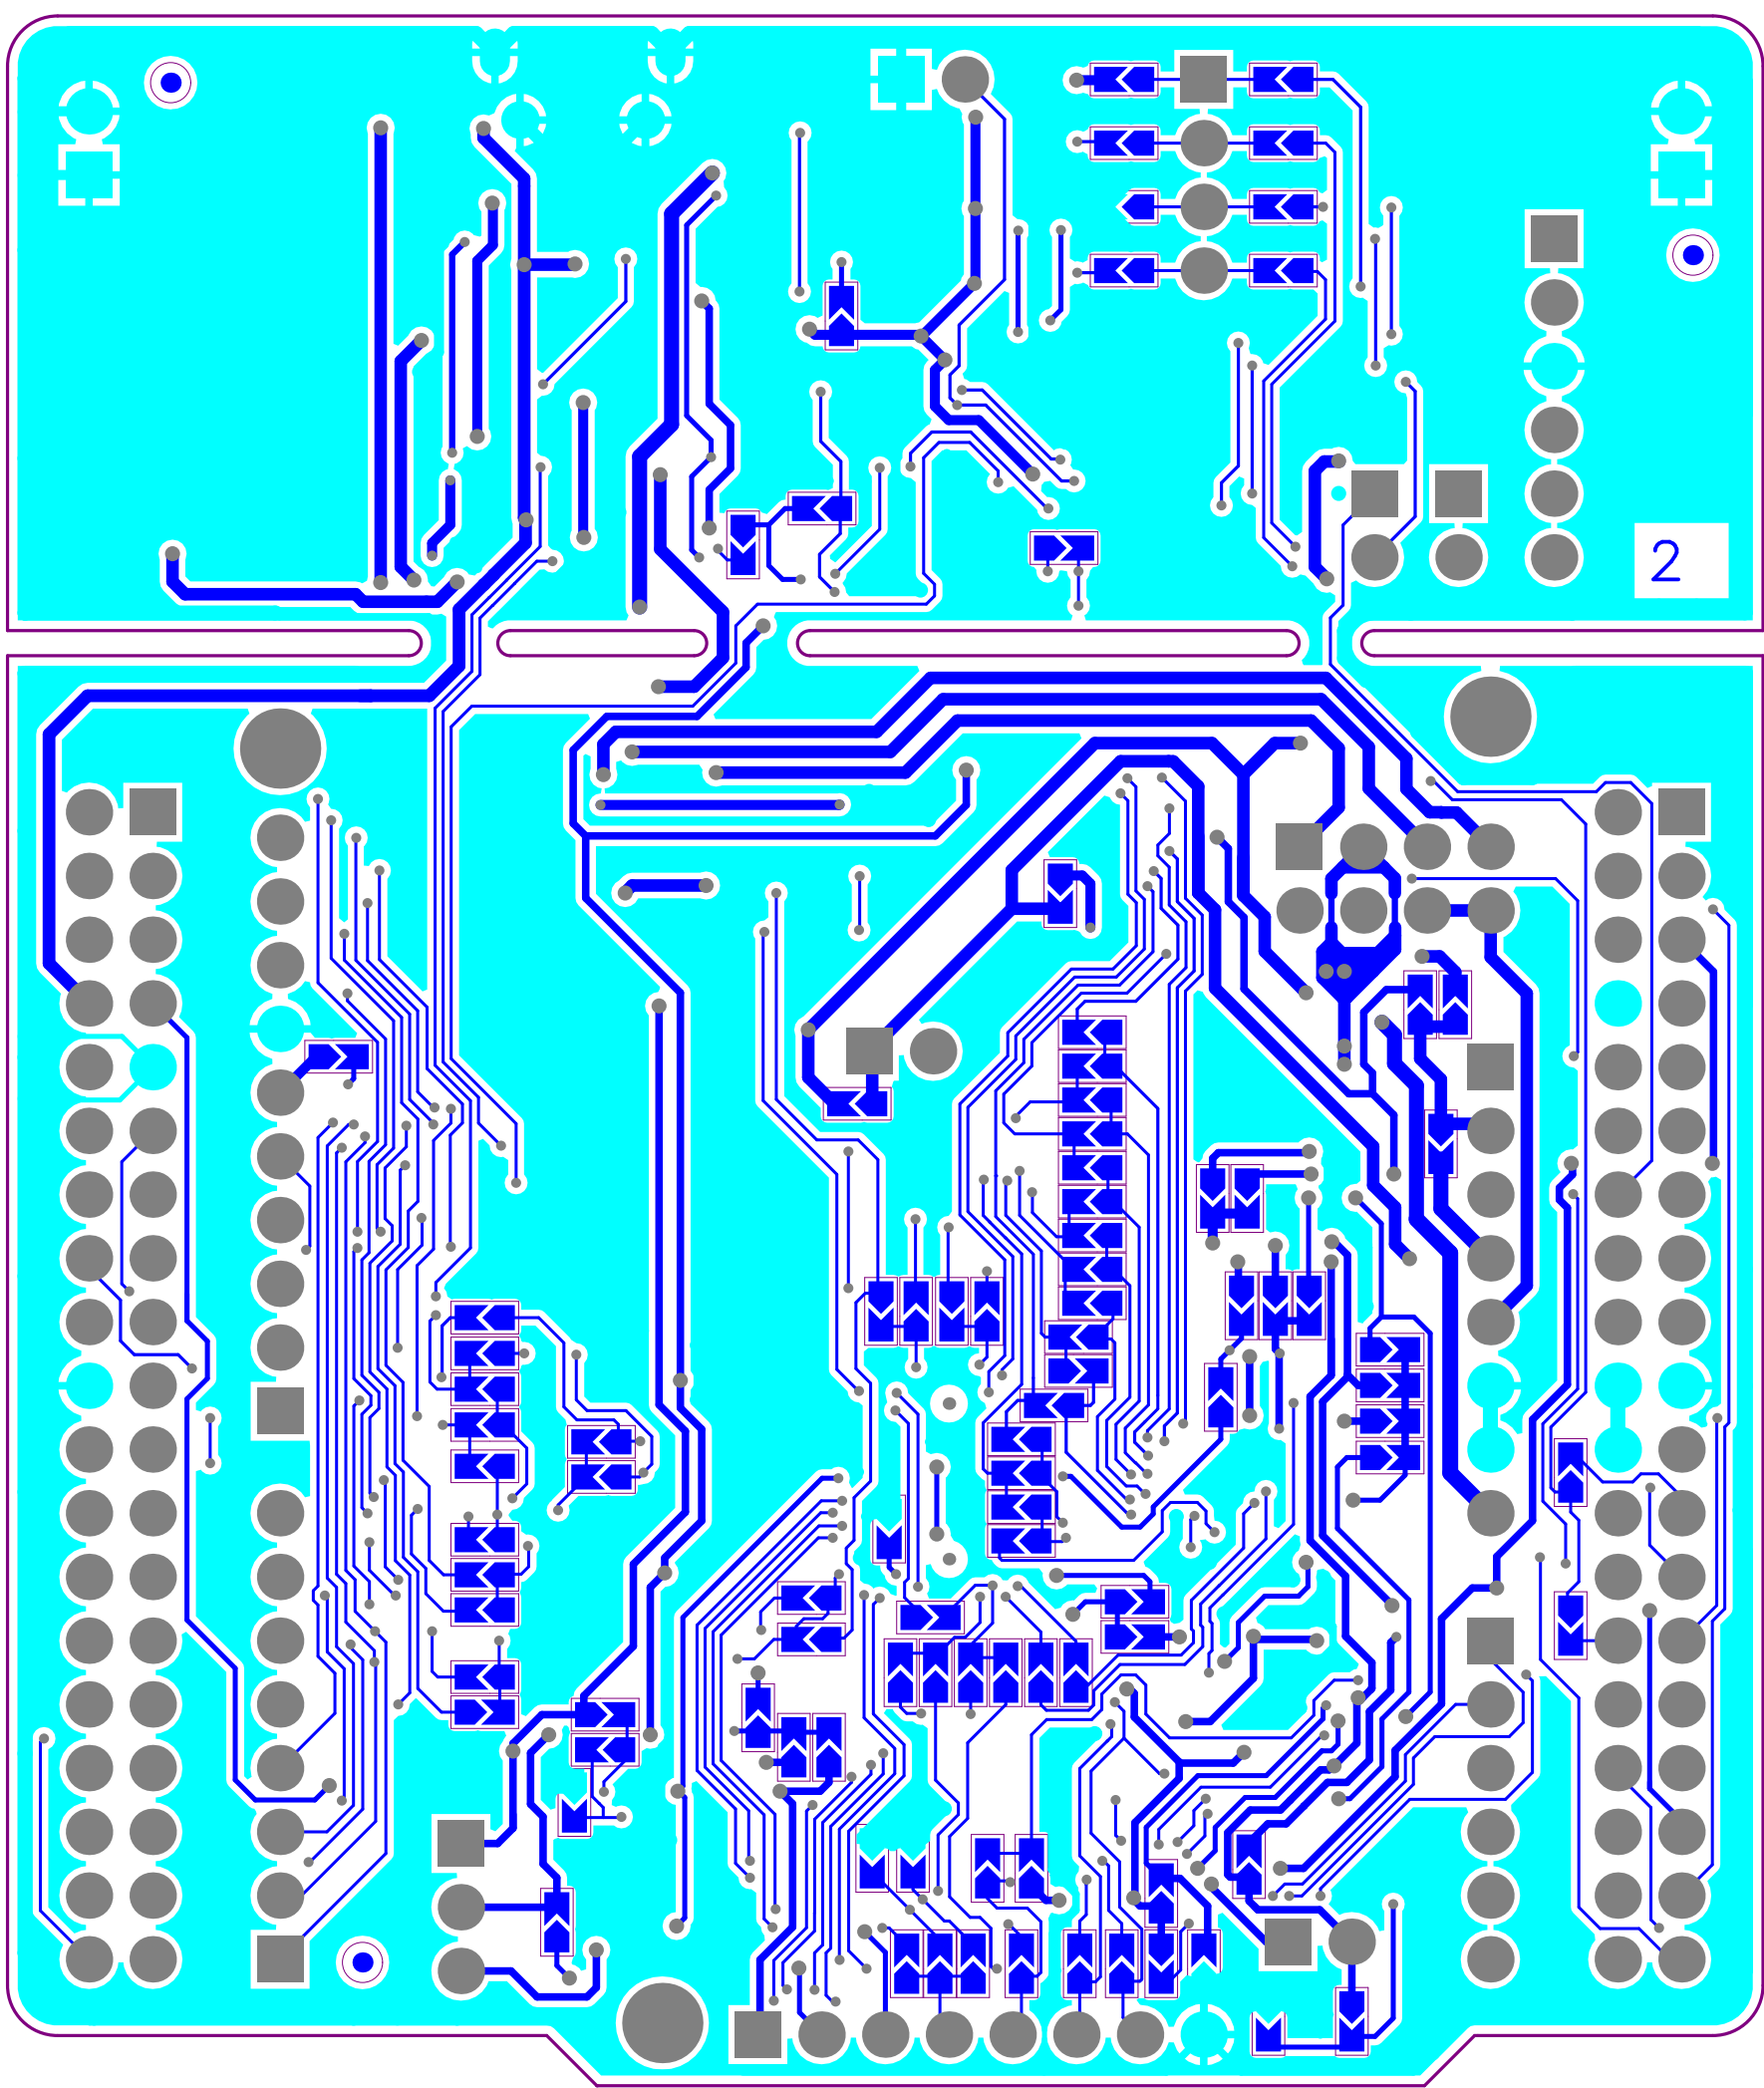

SOLDER MASK, (SECONDARY)

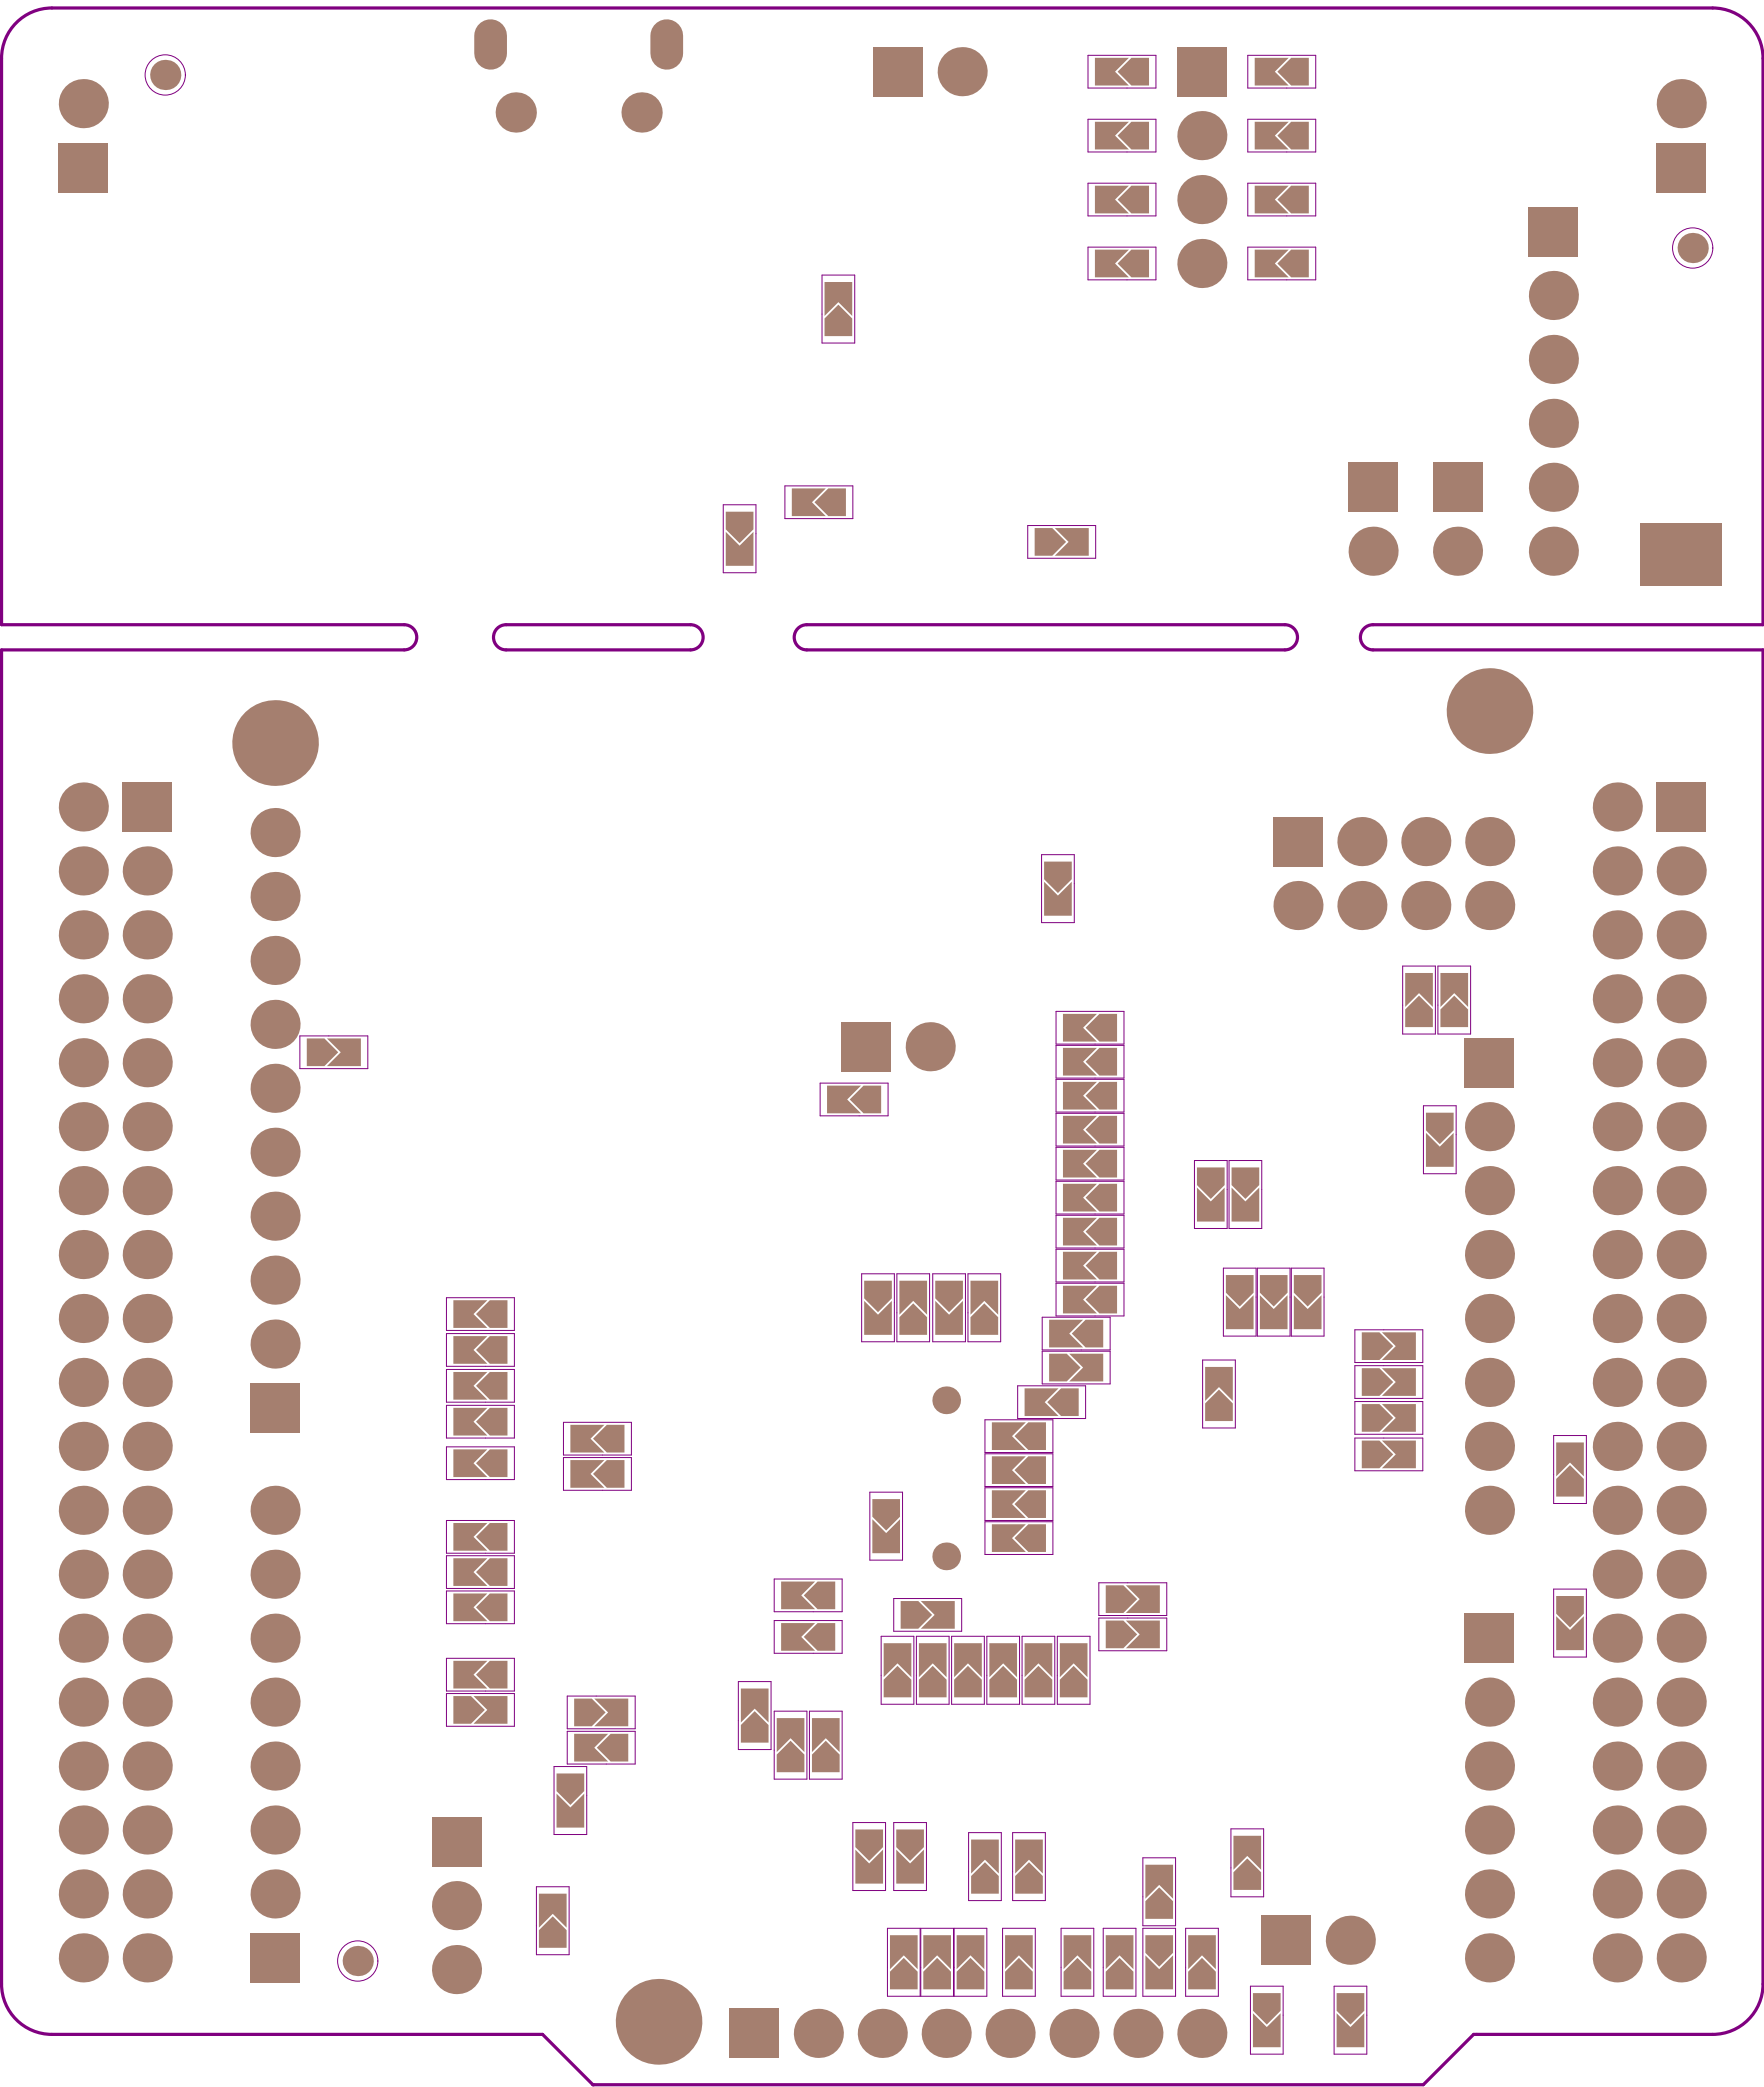

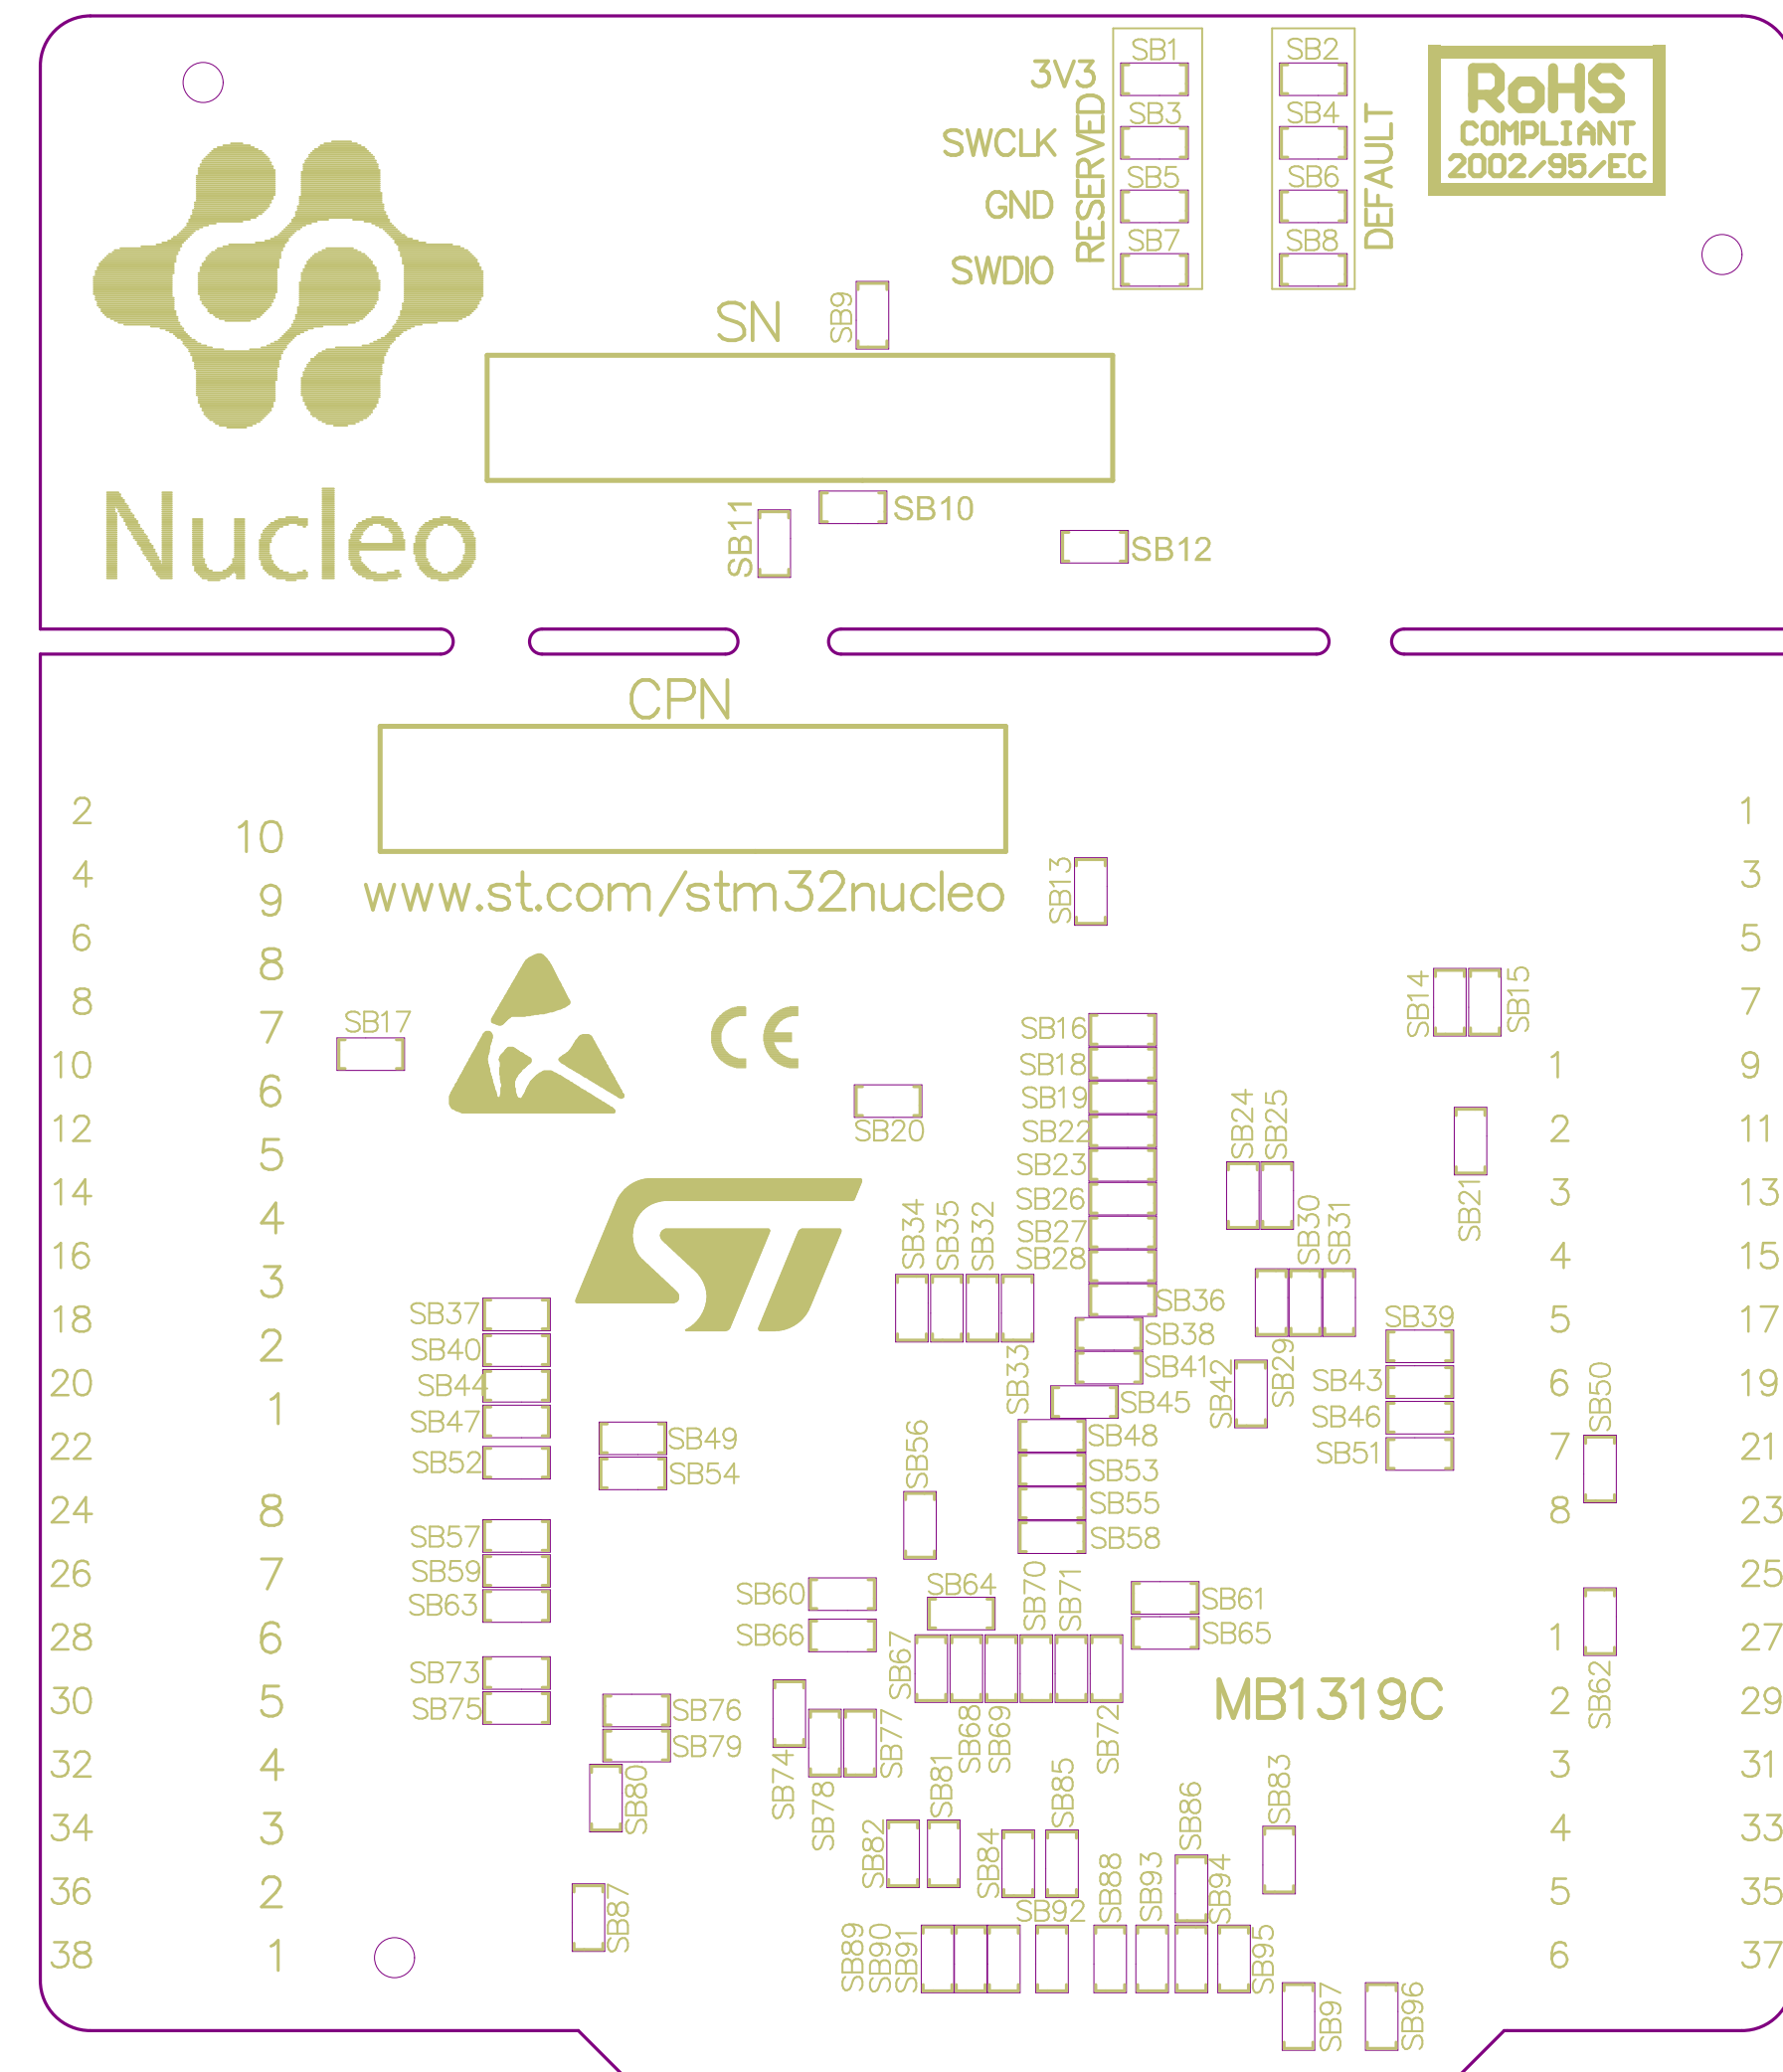

SILKSCREEN, (SECONDARY)



Symbol	Count	Hole Size	Plated	Hole Type	Hole Length	Routed Path Length
	2	0.600mm (23.62mil)	PTH	Slot	1.300mm (51.18mil)	0.700mm (27.56mil)
	2	0.900mm (35.43mil)	PTH	Round	—	—
	2	1.000mm (39.37mil)	NPTH	Round	—	—
	3	3.200mm (125.98mil)	NPTH	Round	—	—
	32	1.100mm (43.31mil)	PTH	Round	—	—
	119	1.000mm (39.37mil)	PTH	Round	—	—
	198	0.300mm (11.81mil)	PTH	Round	—	—
	802	0.200mm (7.87mil)	PTH	Round	—	—
	1160 Total					

Slot definitions : Routed Path Length = Calculated from tool start centre position to tool end centre position.
Hole Length = Routed Path Length + Tool Size = Slot length as defined in the PCB layout

Layer Stack Up Detail for: MB1319C.PcbDoc

Layer Name	Gerber Document	Copper Thickness	Dielectric Height	Dielectric Material	Dielectric Constant	Dielectric Type
Top Solder Mask	(.GTS)		0.4mil	Solder Resist	3.50	
Top Layer	(.GTL)	1.4mil	59.055mil	FR-4	4.80	Core
Bottom Layer	(.GBL)	1.4mil				
Bottom Solder Mask	(.GBS)		0.4mil	Solder Resist	3.50	

Notes:

Silkscreen color : Blue ink PANTONE 2955

Solder resist color : White

Plating type : lead Gold